




ENDURO QK15 RUGGED 15.6" NOTEBOOK

The Enduro QK15 is a cost efficient rugged 15.6" notebook designed for professionals in the industry, field service, transportation and public safety. Enduro QK15 sets up a new definition for rugged laptops by passing a 4 feet (1.22 m) free-drop test and IP65 rating protection. It provides exceptional computing, powerful graphic performance, various wireless connection and long battery life in a balanced factor among display size and weight.



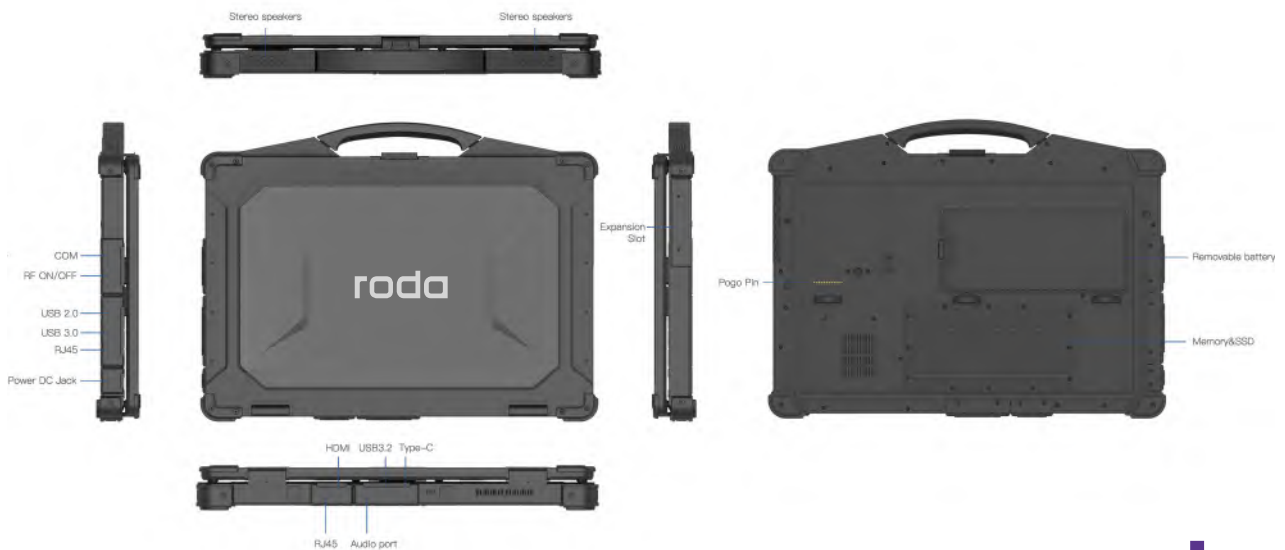

QK15

+ DISPLAY

LCD 15.6" FHD (1920x1080)
LED backlight 1000 cd/m²
Optional: 10-Point Capacitive Screen,
Corning Gorilla Glass; Hardness above 7H;
Scratch-resistant; Supports glove touch

+ CPU

Intel® Core™ Ultra 7 processor 155H
OPTIONAL:
Intel® Core™ Ultra 5 processor 125H

+ CHIPSET

Intel® Meteor Lake Platform

+ GRAPHICS

Intel® Arc™ graphics

+ MEMORY

DDR5 16 GB (4800MHz) (2 slots, max 64 GB)

+ STORAGE

256 GB / 512 GB / 1 TB / 2 TB

+ CAMERA

5 MP front camera
Camera Indicator Light
WebCam Cover

+ INTERFACES

1x USB3.2, 1x USB3.0, 1x USB2.0
1x TYPE-C, Supports Thunderbolt 4
1x 3.5mm Earphone Jack
1x HDMI 2.0a mini, 1x SIM card, 1x TF card
1x RJ45 10M/100M/1000M self-adaptive,
1x RJ45 10M/100M/1000M self-adaptive
1x RS232, 9 fully functional lines
1x DC in, 1x expansion slot
Optional: 12PIN Pogo Pin (USB & Charging)
M.2 E-KEY for custom modules in exp. slot

+ CONNECTIVITY [WLAN / BT / GPS]

WLAN Wi-Fi 6 802.11 a/b/g/n/ac/ax
Bluetooth 5.1 BLE
+ OPTIONAL:
GPS
2G/3G/4G LTE module
5G LTE module

+ DATA COLLECTION

Fingerprint reader
+ OPTIONAL:
NFC module

+ POWER SUPPLY

Li-ion battery built-in, 11.1 V, 1300 mAh,
max ~1.5 hrs battery life time
Li-ion battery hotspap, 11.55 V, 4850 mAh,
~8 hrs battery life time
AC-adaptor 71 W, 100-240 V, 50-60 Hz

+ SECURITY

TPM 2.0
Kensington lock

+ OPERATING SYSTEM

Windows 10/11 Pro

+ DIMENSIONS [W×H×D]

407 x 45.5 x 305.8 mm

+ WEIGHT

3.3 kg

+ PROTECTION CLASS

IP65

+ CERTIFICATION

MIL-STD-810H


+ KEYBOARD

English, Ukrainian
with Backlight

MIL-STD-810H	OPERATING	STORAGE
TEMPERATURE	-20 °C to +60 °C OPTIONAL: -30 °C AC powered	-30 °C to +70 °C
HUMIDITY	95 % Non-Condensing	95 % Non-Condensing
DROP	1.22 m	1.22 m

Accessories

- Li-ion battery, 11.55 V 4850 mAh
- Charger for 4 batteries

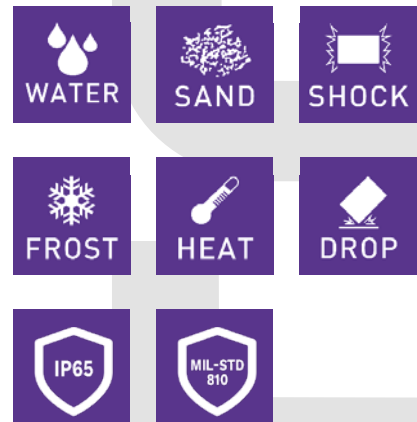

CUSTOMIZATION:

Need anything not included in the data sheet? roda products are designed to enable customization to your specific program requirements. Please contact your roda sales team member to find the best solution for your requirements.

roda computer GmbH reserves the right to change without notice the information.

roda
RUGGED IT & ELECTRONICS

www.roda-computer.com